# HS-422I/M Intrinsically Safe Accelerometer 4-20mA acceleration output via PUR Cable


# **Key Features**

- Intrinsically Safe with European, USA and South African approvals
- · For use with PLC/DCS systems
- Waterproof
- · Resistant to oil

#### Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical



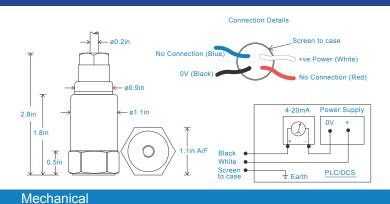

### **Technical Performance**

Mounted Base Resonance	10kHz min
Acceleration Ranges	see: 'How To Order' table ±10%
	Nominal 80Hz at 72°F
Frequency Response	600cpm (10Hz) to 300kcpm (5kHz) ± 5%
	- ISO10816
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	5.9ft. lbs
Weight	5.2 oz. (nominal)
Maximum Cable Length	3,280 ft.
Standard Cable Length	16 ft.
Sheilded Cable	PUR - length to be specified with order
Mounting Threads	see: 'How To Order' table
Submersible Depth	328 ft. max. (10 bar)

#### Electrical


Current Output 4-20mA DC proportional to acceleration Supply Voltage 15-30 Volts DC (for 4-20mA) Settling Time 2 seconds Loop Resistance 600 Ohms max. at 24 Volts **Output Impedance** >108 Ohms at 500 Volts Case Isolation

# Environmental

**Operating Temperature Range** Sealing Maximum Shock EMC

see: attached certification details IP68 5000g EN61326-1:2013

# **Typical Frequency Response**

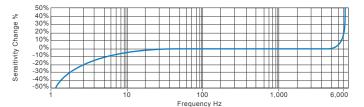

# Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, **Process Equipment** 

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



Certifications













www.hansfordsensors.com sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice TS435U.5




# HS-422I/M Intrinsically Safe Accelerometer 4-20mA acceleration output via PUR Cable

Intrincically Safa Paquir

	Intrinsically Safe Requi	rements				
	Maximum Cable Length	nominal 100 metres	US/Canada Approvals	Cer	rtificate No. USTC/15/FAI/01350	)
	, and the second s	see attached system drawings	Class I, II, III, Division 1	, 2, Groups	s A - G, T6, -40°C to +60°C, IP65	j
		, ,	Class I, Z	Zone 0, AE>	x, ia, IIC, T6, Ga, -40°C to +60°C	;
	Certificate details: Group I + II	IECEx BAS08.0034X	Zone 20, AE	x, ia, IIIC, <sup>-</sup>	T80°C, IP65, Da, -40°C to +60°C	;
		Baseefa08ATEX0086X				
		©II 1GD	Barrier	1 x P	Pepperl + Fuchs Galvanic Isolator	-
		Ex ia IIC T6 Ga			TC4-Ex1, which has superseded	
		Ex ia IIIC T80°C IP65 Da		KFD2-C	R-Ex1.30300 (BAS00ATEX7164)	)
		🖾 l M1			see attached system drawings	;
		Ex ia I Ma				
		(-40°C ≤ Ta ≤ +60°C)	1 x MTL 2	Zener Barrie	er MTL7787+ (BAS01ATEX7217)	)
				C	or Pepperl + Fuchs Zener Barrier	
Accelerometer System Certificate Baseefa08Y008		ate Baseefa08Y0087	Z787	(BAS01ATE	EX7005) or any other barrier that	í.
		Ex ia IIC T6 (-40°C $\leq$ Ta $\leq$ +60°C)		confor	rms to system drawings attached	1
		*On request - consult Sales Office				
			System Connections for Zener	Barrier	see attached system drawings	j.
	Terminal Parameters	Ui = 28V, li = 115mA, Pi = 0.65W Group II				
		Ui = 16.5V Pi = 0.65W	System Connections for Galvan	ic Isolator	see attached system drawings	5
		or Ui = 28V li = 115mA Pi = 0.65W Group I				
			Terminal Parameters		Ui = Vmax = 28V	1
	500V Isolation	Units Will Pass A 500V Isolation Test			li = Imax = 115mA	<u>،</u>
					Pi = 0.65W	1
		Ex ia IIC T6 Ga (-40°C ≤ Ta ≤ +60°C) (Gas)				
Ex ia IIIC T80°C IP65 Da(-40°C ≤ Ta ≤ +60°C) (Dust)				ons of safe use for Group II dust.		
Ex ia I Ma ( $-40^{\circ}C \le Ta \le +60^{\circ}C$ ) (Mining)			The free end of the cable on the integral cable			
	version of the apparatus must be termin					
	South African Approval	Certificate No. MASC MS/16-0229X	an		ely certified dust-proof enclosure.	
		Group I and II (As Baseefa/ATEX)		T	he unit has no serviceable parts.	

How To Order

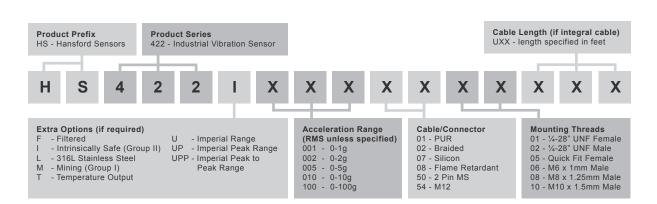



www.hansfordsensors.com sales@hansfordsensors.com

