
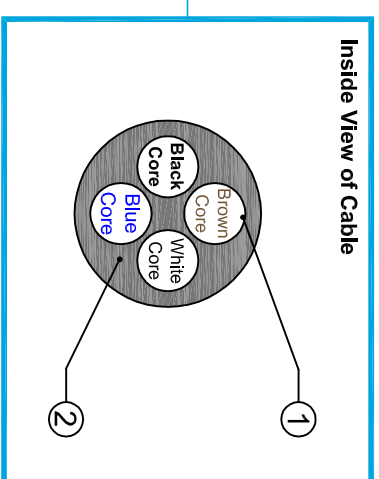



Connection Details of Cable Assembly

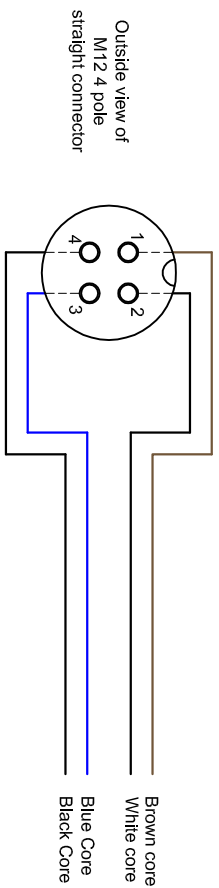

Connector sealed to IP66 only when connected to the accelerometer.

M12 Adaptor

316 Stainless Steel Protective Conduit

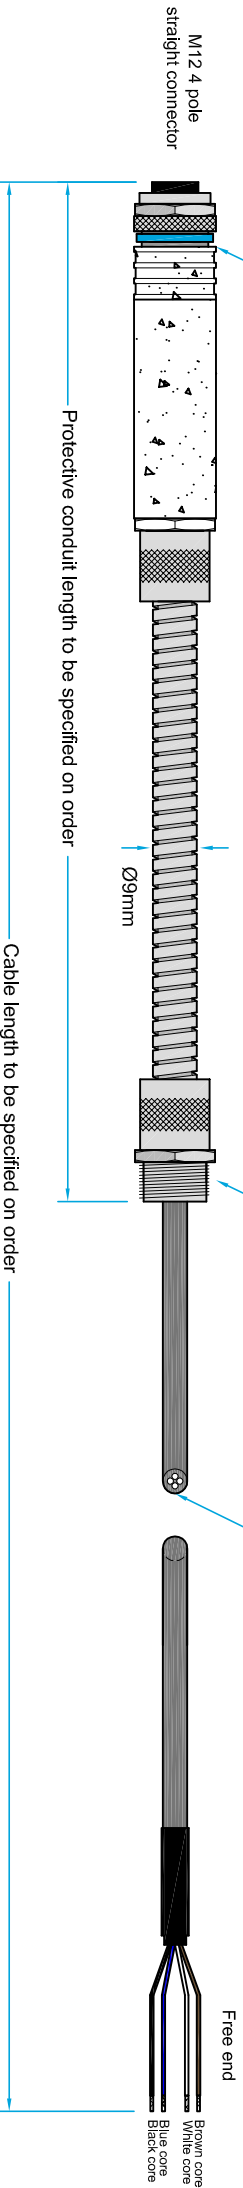

Materials of Cable: C01-078 PUR Cable			
Pos	Description	Dimension	Overall Diameter
Cable description: LPF9YHC11YH 4 x 0.34mm ² wire qualified for drag chains acc. to UL/CSA 20233			
1.	Conductor, bare soft copper wire	Bending radius	min. 10 x outer-Ø min. 5 x outer-Ø 0.10mm
2.	Outer sheath, Polyether-Polyurethane PUR11Y Flame retardant acc. to VDE 0472, Part 804/B Oil resistant acc. to VDE 0472, Part 803 Halogen free, free of silicone, seawater-resistant		5.9 ±0.2mm
			Grey

Technical Data		Technical Data of Cable	
	Values at 20°C		Unit
Operating Voltage	250		V
Insulation Resistance	≥10 ⁸ Ω		Ohms
Ampacity	4A		Amps
Ambient Temperature	-30°C to + 90°C		°C