

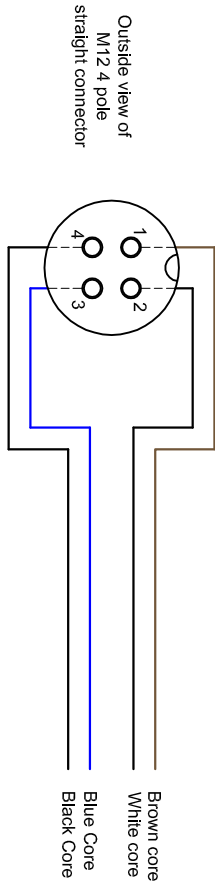


### Connection Details of Cable Assembly

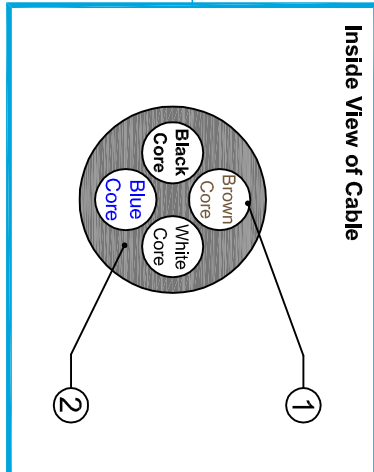

Connector sealed to IP66 only when connected to the accelerometer.

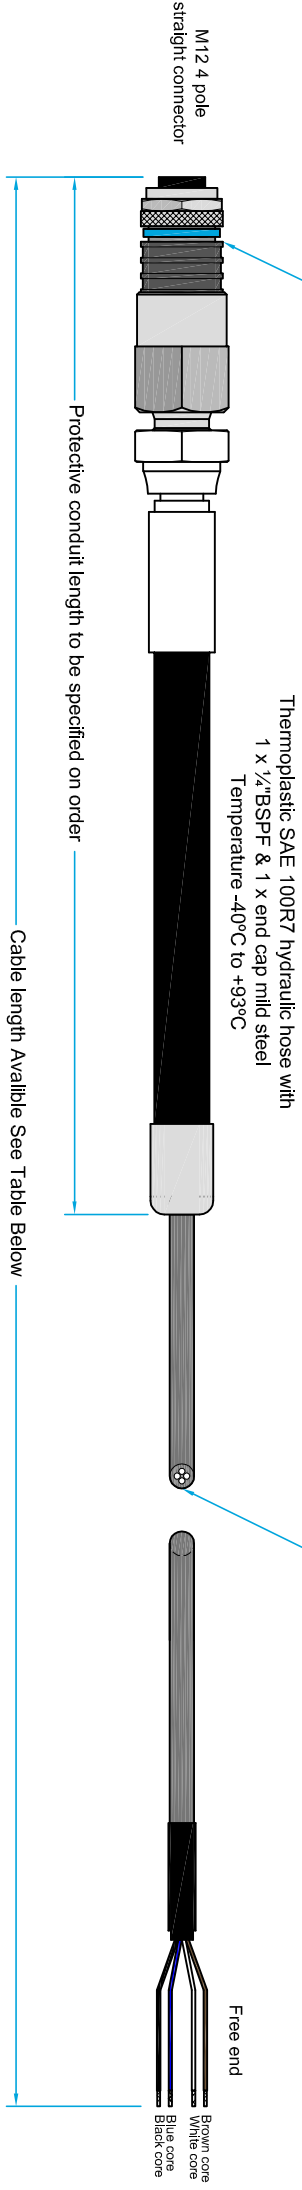

Materials of Cable: C01-078 PUR Cable			
Pos	Description	Dimension	Remarks
Cable description: LFPYHC11YH 4 x 0.34mm <sup>2</sup> wire qualified for drag chains acc. to UL/CSA 20233			
1.	Conductor, bare soft copper wire	Bending radius min. 10 x outer-Ø min. 5 x outer-Ø	Moving Fixed Installation acc. to VDE 0295, cl 6
2.	Outer sheath, Polyether-Polyurethane PUR11Y Flame retardant acc. to VDE 0472, Part 804/B Oil resistant acc. to VDE 0472, Part 803 Halogen free, free of silicone, seawater-resistant	5.1 ±0.2mm	Grey

<b>Cable Length</b>
5 Meters
10 Meters

Technical Data of Cable		
Technical Data	Values at 20°C	Unit
Operating Voltage	250	V
Insulation Resistance	≥10 <sup>9</sup> Ω	Ohms
Ampacity	4A	Amps
Ambient Temperature	-30°C to +90°C	°C



**Hansford Sensors**  
Sensors in Motion Measuring

Tel: +44(0) 845 680 1957  
Fax: +44(0) 845 680 1958  
Email: sales@hansfordsensors.com  
Web: www.hansfordsensors.com