


HS-SE-SSM Switching Enclosure

Stainless Steel

Key Features


- BNC and 2 Pin MS output
- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via one connector
- Easy to install

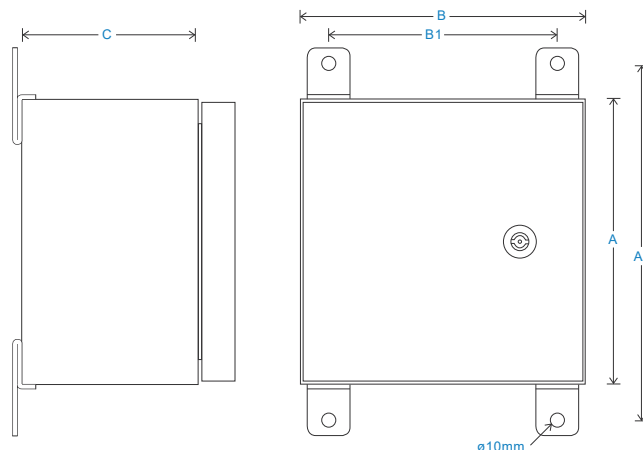

Technical Performance

| | | | |
|----------------|--|-----------|--|
| Inputs | Via accelerometer | Door | Lock and polyamide key |
| Output | BNC and 2 Pin MS as standard | Glanding | Glands supplied but not fitted |
| Mounting Board | PCB Panel (customisable upon request) | | Holes are punched for: Single input M12 - ø3.5-7mm cable Single input M20 - ø7-13mm multi-core cable Multi input M20 - 3 x ø5.3mm |
| Material | 304 Stainless Steel (to be specified in options of 'How To Order' table) | | Channel locations - other labelling available upon request |
| Dimensions | see: diagram | Labelling | supplied are 4 x Brackets |
| Termination | Spring-loaded terminal (no screwdriver required) | Mounting | EN61326-1:2013 |
| Sealing | IP66 | EMC | |

How To Order

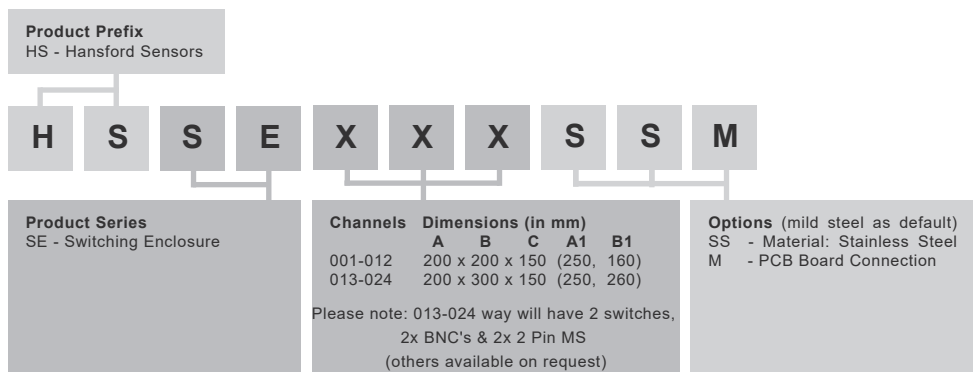

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS412.11

